

KL

Solar

Photovoltaic
Modules



KL20 / KL25 / KL30

KL Solar provides cost-effective photovoltaic power for general use, operating DC directly or, in an inverter-equipped system, AC loads. The 36 cells in series provides 30 watts of maximum power, it is used primarily in utility grid-supplemental systems, telecommunications, remote villages and clinics, pumping and load-based aids to navigation.

M5

&

P5

S
E
R
I
E
S



*M5 Series:
Monocrystalline modules*

*P5 Series:
Polycrystalline Modules*

Proven Materials and Construction

KL Solar experience shows in every aspect of this module's construction and materials

- Anodized aluminum frame offers required strength and allows for quick and easy installation on standard array structures.
- 36 Crystalline silicon solar cells in series.

- Modules are laminated in toughened low iron content PV grade glass – Ethyl Vinyl Acetate films – PV module back sheet.


- Optimized lamination process parameters ensure a stable laminate. Junction Box with PG Cable glands are standard in all modules.

- Each module is flash tested in a Sun simulator to ensure conformity to specification.

Electrical and Mechanical Data

Model	KL20	KL25	KL30
Maximum power (Pmax)	20 Wp	25 Wp	30 Wp
Open Circuit Voltage (Voc)	21.0 V	21.5 V	21.8 V
Maximum power point voltage (Vmpp)	17.0 V	17.1 V	17.3 V
Short circuit current (Isc)	1.32 A	1.63 A	1.93 A
Maximum power point current (Impp)	1.18 A	1.46 A	1.73 A
Tolerance	±10%	±10%	±10%
Cell Size (mm)	41.66 X 125	41.66 X 125	41.66 X 125
No. of cells	36	36	36
Dimensions (mm) ± 1	550 x 449 x 38	550 x 449 x 38	550 x 449 x 38
Maximum system voltage	600	600	600
Temperature co-efficient	NOCT (°C)45	NOCT (°C)45	NOCT (°C)45
α (Voc) (mV/°C)	- 105	- 105	- 105
β (Isc) (mA/°C)	- 0.32	- 0.32	- 0.32
χ (Pmax) (%/°C)	- 0.45	- 0.45	- 0.45
Weight (kgs)	2.9	2.9	2.9

Standard Test Condition : Irradiance 1,000 W/sq.m, Temperature 25deg C Air mass 1.5 spectrum)

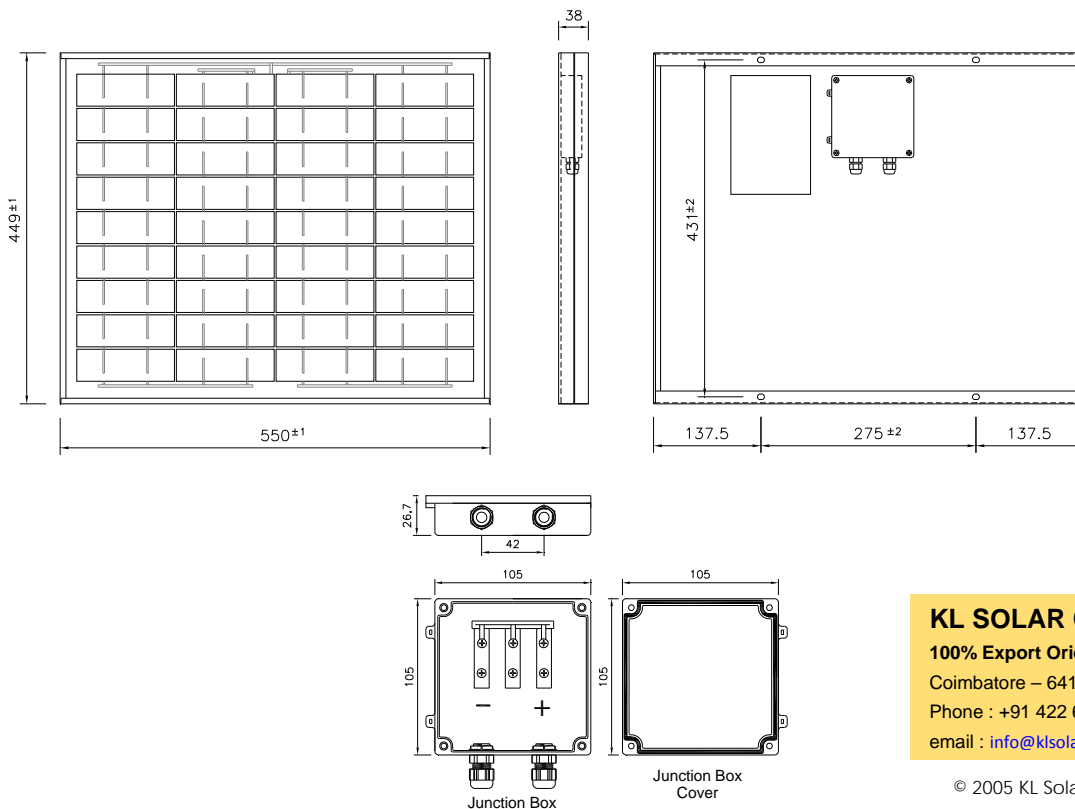

KL SOLAR COMPANY PVT LTD.,
100% Export Oriented Unit,
 Coimbatore – 641 014. INDIA.
 Phone : +91 422 6563638 / Fax : +91 422 2567562
 email : info@klsolar.com / www.klsolar.com

© 2005 KL Solar Company. All rights reserved.